


Marine High Bay Light

Features

- Up to 100m/W luminous efficacy
- Sea-water resistant
- Non-plated parts are stainless steel
- IK08 impact resistance
- IP67 rating
- Die-cast aluminum housing with powder coating
- IES files available

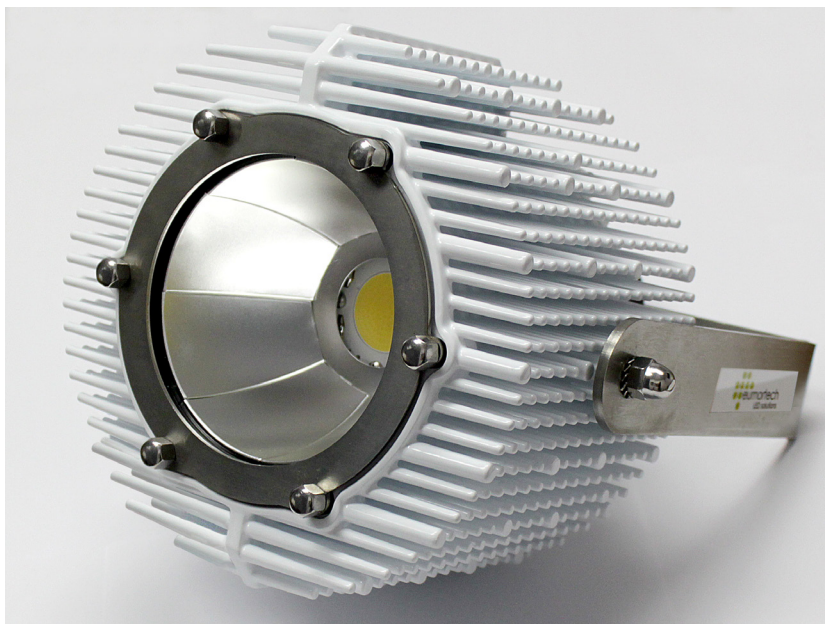

Technical data

Product number	ELS-EHBxxxx
LEDs Count	1 COB
LED Brand	Bridgelux
Input Voltage (VAC)	90-230VAC 50/60Hz
Power (W)	100
Luminous Flux (lm)	10,000
Dimmable	yes
Power Factor (PF)	>0.95
Color Temperature (K)	4,000-6,500
CRI	>80
Beam Angle	120°
Dimensions	200mm x 203mm x 174.75mm 7.87" x 8.00" x 6.88"
Operating temperature	-35 °C - +45°C